




STAINLESS STEEL FULL BORE SAFETY VALVE

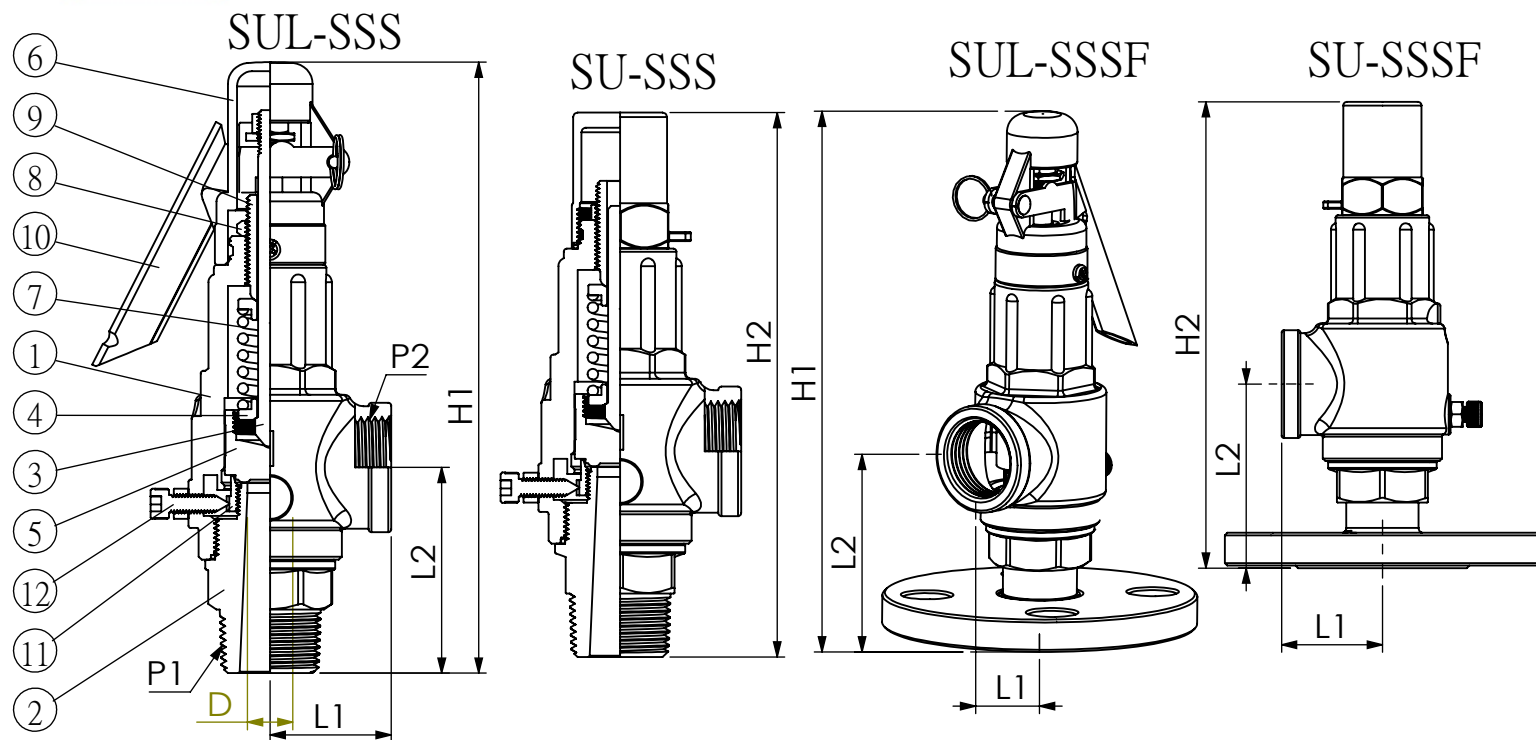

材質表 General material

NO.	NAME	TYPE	SUL-SSS 手拉式 Safety Valve with lever metal to metal	SU-SSS 密封式 Safety Valve with Sealing metal to metal	SUL-SSSF 手拉式 Inlet : Flange Outlet : Thread	SU-SSSF 密封式 Inlet : Flange Outlet : Thread
1	閥體 VALVE BODY		CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M
2	閥座 VALVE SEAT		CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M
3	閥桿 STEM		SUS304	SUS304	SUS304	SUS304
4	彈簧座 SPRING SEAT		SUS304	SUS304	SUS304	SUS304
5	閥盤 DISC		SUS304/316	SUS304/316	SUS304/316	SUS304/316
6	閥蓋 CAP		CF8	CF8	CF8	CF8
7	彈簧 SPRING		SUS304	SUS304	SUS304	SUS304
8	螺帽 NUT		SUS304	SUS304	SUS304	SUS304
9	調整螺絲 ADJUST SCREW		SUS304	SUS304	SUS304	SUS304
10	把手 HANDLE		SUS304	-	SUS304	-
11	下環 LOW RING		SUS304	SUS304	SUS304	SUS304
12	固定螺絲 FIX SCREW		SUS304	SUS304	SUS304	SUS304
使用溫度 WORKING TEMP (°C)			-196°C~290°C		-196°C~290°C	

Special size, pressure range and the actual material should contact the manufacturer.
特殊尺寸,調壓範圍及實際材質需與廠商聯繫訂製。


尺寸表 Dimension (mm)

SUL-SSS ~ SU-SSS								SUL-SSSF ~ SU-SSSF							
NOMINAL			L1	L2	H1	H2	Working Pressure(Kg/cm2)	NOMINAL			L1	L2	H1	H2	Working Pressure(Kg/cm2)
P1	D	P2						P1	D	P2					
1/2"	14	1"	40	60.8	194.8	172.8	1~30	1/2"	14	1"	40	65.8	199.8	177.8	1~30
3/4"	15	1"	40	65.4	199.4	177.4	1~30	3/4"	15	1"	40	70.4	204.4	182.4	1~30
1"	15	1"	40	68	202	180	1~30	1"	15	1"	40	73	207	185	1~30
1"	19	1 1/4"	52	71.7	216.9	195.4	1~20	1"	19	1 1/4"	52	76.7	221.9	200.4	1~20
1 1/4"	30	2"	66	92	282.9	259.4	0.4~20	1 1/4"	30	2"	66	98	288.9	265.4	0.4~20
1 1/2"	30	2"	66	92	282.9	259.4	0.4~20	1 1/2"	30	2"	66	98	288.9	265.4	0.4~20
2"	30	2"	66	93	283.9	260.4	0.4~20	2"	30	2"	66	99	289.9	266.4	0.4~20
2"	43	2 1/2"	76.5	103.5	300.9	277.4	1~16.5	2"	43	2 1/2"	76.5	109.5	306.9	283.4	1~16.5
2"	43-38	2 1/2"	76.5	103.5	300.9	277.4	16.5~25	2"	43-38	2 1/2"	76.5	109.5	306.9	283.4	16.5~25
2"	38-27	2 1/2"	76.5	103.5	300.9	277.4	25~46	2"	38-27	2 1/2"	76.5	109.5	306.9	283.4	25~46
2 1/2"	43	2 1/2"	76.5	104.5	301.9	278.4	1~16.5	2 1/2"	43	2 1/2"	76.5	110.5	307.9	284.4	1~16.5




BRONZE SAFETY RELIEF VALVES


S10L-SSS

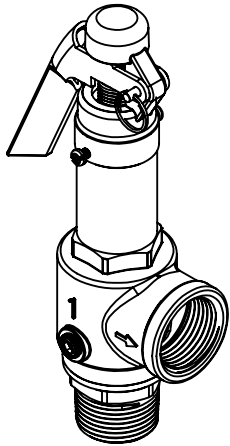


S10-SSS

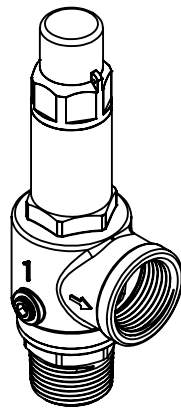

S10L-STC

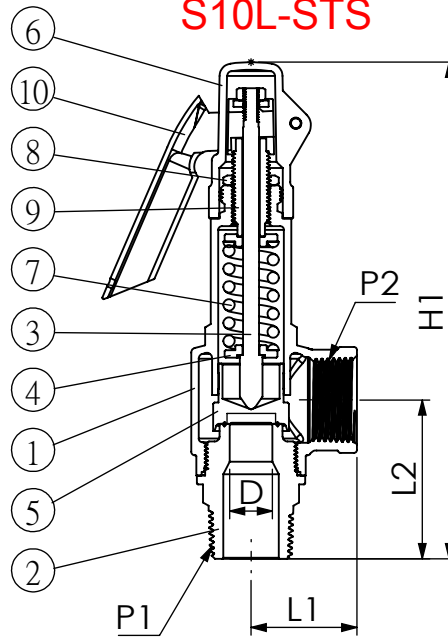

S10-STC

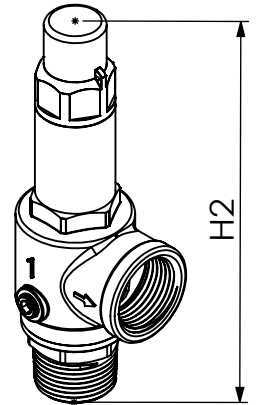

材質表 General material

NO.	TYPE NAME	S10L-SSS Bronze Safety Vale with Lever	S10-SSS Bronze Safety Vale with Sealing	S10L-STC Bronze Safety Vale with Lever	S10-STC Bronze Safety Vale with Sealing
1	閥體 VALVE BODY	BRONZE	BRONZE	BRONZE	BRONZE
2	閥座 VALVE SEAT	BRASS	BRASS	BRASS	BRASS
3	閥桿 STEM	BRASS	BRASS	BRASS	BRASS
4	彈簧座 SPRING SEAT	BRASS	BRASS	BRASS	BRASS
5	閥盤 DISC	BRASS	BRASS	BRASS+PTFE	BRASS+PTFE
6	閥蓋 CAP	BRONZE	BRASS	BRONZE	BRASS
7	彈簧 SPRING	STEEL	STEEL	STEEL	STEEL
8	螺帽 NUT	BRASS	BRASS	BRASS	BRASS
9	調整螺絲 ADJUST SCREW	BRASS	BRASS	BRASS	BRASS
10	把手 HANDLE	STEEL	-	STEEL	-
使用溫度 WORKING TEMP(°c)		-196°C~225°C			


Special size, pressure range and the actual material should contact the manufacturer.
特殊尺寸,調壓範圍及實際材質需與廠商聯繫訂製。

尺寸表 Dimension (mm)

入口 P1 Inlet	閥座徑 D Seat diameter	出口 P2 Outlet	L1	L2	H1	H2	Working Pressure (Kg/cm2)
1/2"	13	1/2"	34.5	47.5	159	134	0.25~40
3/4"	13	3/4"	37	50.25	167	142	0.5~40
1"	21	1"	42	63	197	175.5	0.4~40
1-1/4"	26	1-1/4"	50.5	73	219.4	198.5	0.5~40
1-1/2"	30	1-1/2"	58	83.9	252.3	231.4	0.5~20
1-1/2"	30-25	1-1/2"	58	83.9	252.3	231.4	20~40
2 "	39	2"	65	87	283.5	251	0.5~20
2 "	39-32	2"	65	87	283.5	251	20~35



STAINLESS STEEL SAFETY VALVE

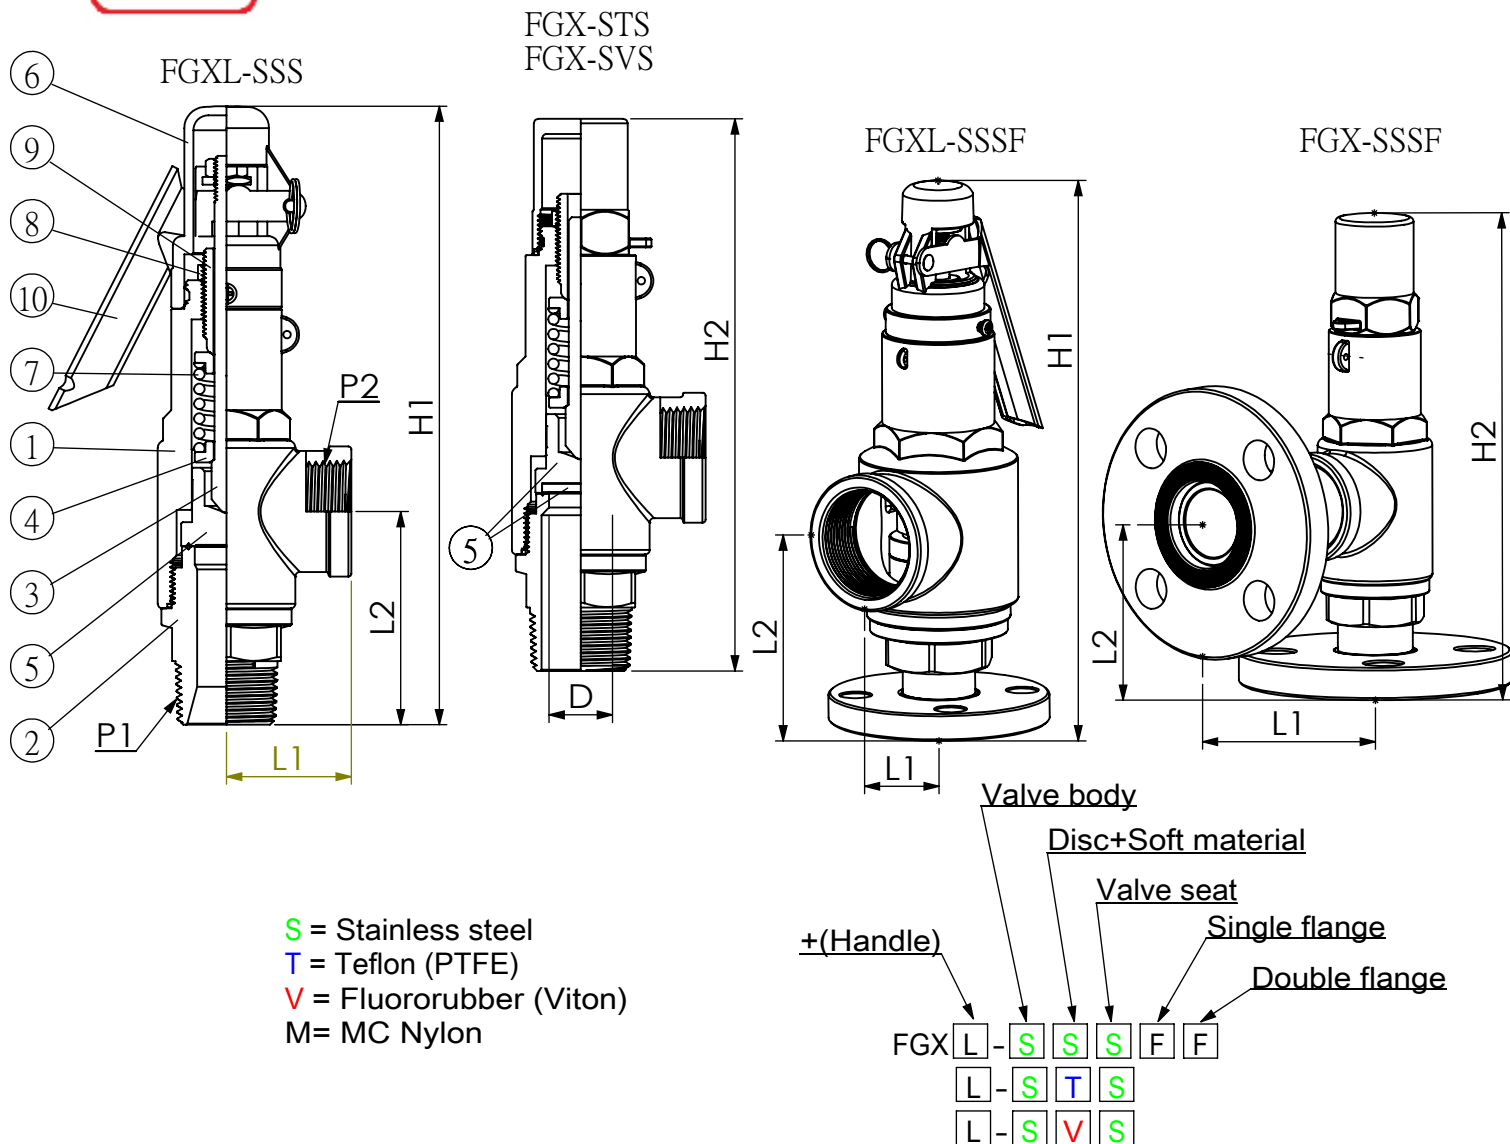


材質表 General material

NO	TYPE NAME	FGXL-SSS 手拉式 Safety Valve with Lever metal to metal	FGX-SSS 密封式 Safety Valve with Sealing metal to metal	FGXL-SVS 手拉式 Safety Valve with Lever Disc insert Vitonl	FGX-SVS 密封式 Safety Valve with Sealing Disc insert Vitonl	FGXL-ST 手拉式 Safety Valve with Lever Disc insert PTFE	FGX-ST 密封式 Safety Valve with Sealing Disc insert PTFE	FGXL-SSSF 手拉式 Inlet: Flange Outlet: Thread	FGX-SSSF 密封式 Inlet: Flange Outlet: Thread	FGXL-SSSFF 手拉式 Inlet: Flange Outlet: Flange	FGX-SSSFF 密封式 Inlet: Flange Outlet: Flange
1	閥體 VALVE BODY	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M
2	閥座 VALVE SEAT	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M	CF8 / CF8M
3	閥桿 STEM	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
4	彈簧座 SPRING SEAT	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
5	閥盤 DISC	SUS304/316	SUS304/316	SUS304/316 +VITON	SUS304/316 +VITON	SUS304/316 +PTFE	SUS304/316 +PTFE	SUS304/316	SUS304/316	SUS304/316	SUS304/316
6	閥蓋 CAP	CF8	CF8	CF8	CF8	CF8	CF8	CF8	CF8	CF8	CF8
7	彈簧 SPRING	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
8	螺帽 NUT	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
9	調整螺絲 ADJUST SCREW	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
10	把手 HANDLE	SUS304	-	SUS304	-	SUS304	-	SUS304	-	SUS304	-
使用溫度 WORKING TEMP.(°C)		-196°C~290°C		-40°C~200°C		-185°C~200°C		-196°C~290°C		-196°C~290°C	

Special size, pressure range and the actual material should contact the manufacturer.
特殊尺寸,調壓範圍及實際材質需與廠商聯繫訂製。



STAINLESS STEEL SAFETY VALVE

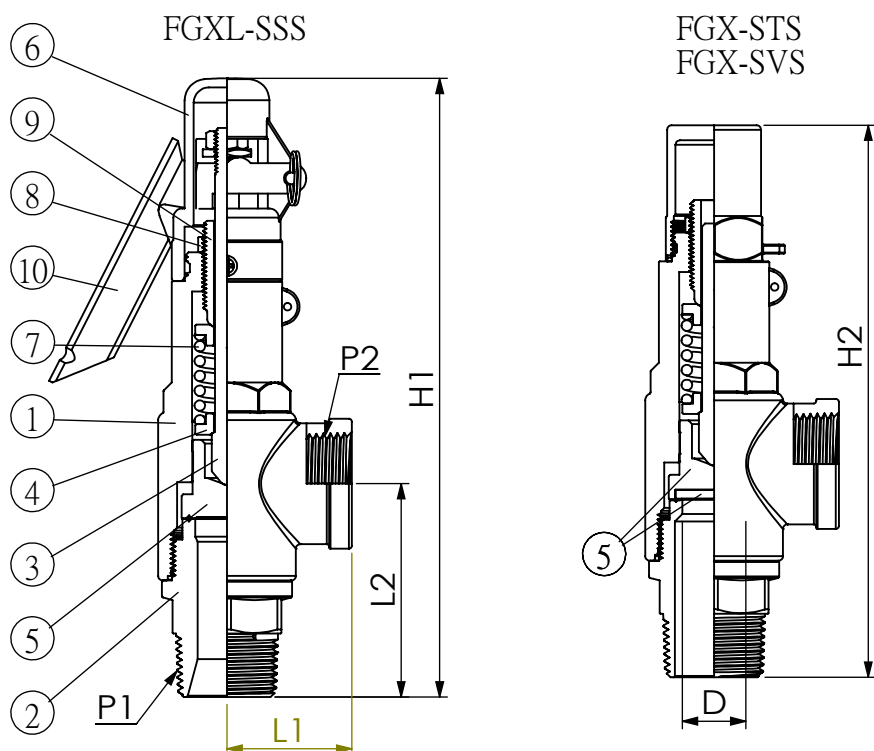


尺寸表(mm)
Dimension (FGXL-SSS ~ FGX-ST)

P1	D	P2	L1	L2	H1	H2	Working Pressure (Kg/cm ²)
1/2"	15	1"	41.25	65.5	199.5	177.5	0.4~40
1/2"	15-10.5	1"	41.25	65.5	199.5	177.5	40~165
1/2"	10.5-7.5	1"	41.25	65.5	199.5	177.5	165~322
1/2"	7.5-5.5	1"	41.25	65.5	199.5	177.5	322~600
1/2"	5.5-5	1"	41.25	65.5	199.5	177.5	600~720
3/4"	19.5	1"	41.25	65	199	177	0.4~40
3/4"	19.5-10.5	1"	41.25	65	199	177	40~165
3/4"	10.5-7.5	1"	41.25	65	199	177	165~322
3/4"	7.5-5.5	1"	41.25	65	199	177	322~600
3/4"	5.5-5	1"	41.25	65	199	177	600~720
1"	21	1"	41.25	70.5	204.5	182.5	0.4~40
1"	21-13	1"	41.25	70.5	204.5	182.5	40~100
1"	13-10.5	1"	41.25	70.5	204.5	182.5	100~165
1"	10.5-7.5	1"	41.25	70.5	204.5	182.5	165~322
1"	7.5-5.5	1"	41.25	70.5	204.5	182.5	322~600
1"	5.5-5	1"	41.25	70.5	204.5	182.5	600~720
1"	25	2"	65	100.3	284	260.5	0.7~20
1 1/4"	33	2"	65	100.8	284.5	261	0.7~20
1 1/4"	33~27.5	2"	65	100.8	284.5	261	20~70
1 1/4"	27.5~22	2"	65	100.8	284.5	261	70~110
1 1/4"	22~20	2"	65	100.8	284.5	261	110~130
1 1/4"	20~15	2"	65	100.8	284.5	261	130~220
1 1/2"	39	2"	65	101.3	285	261.5	0.7~20
1 1/2"	39-30	2"	65	101.3	285	261.5	20~60
1 1/2"	30-27.5	2"	65	101.3	285	261.5	60~70
1 1/2"	27.5-22	2"	65	101.3	285	261.5	70~110
1 1/2"	22-20	2"	65	101.3	285	261.5	110~130
1 1/2"	20-15	2"	65	101.3	285	261.5	130~220
2"	39	2"	65	104.3	288	264.5	0.7~20
2"	39~27.5	2"	65	104.3	288	264.5	20~70
2"	27.5~22	2"	65	104.3	288	264.5	70~110
2"	22~20	2"	65	104.3	288	264.5	110~130
2"	20~15	2"	65	104.3	288	264.5	130~220




STAINLESS STEEL SAFETY VALVE

FGXL-SSSF

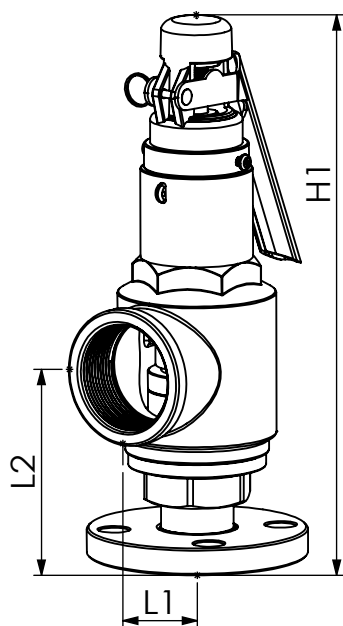

FGX-SSSFF

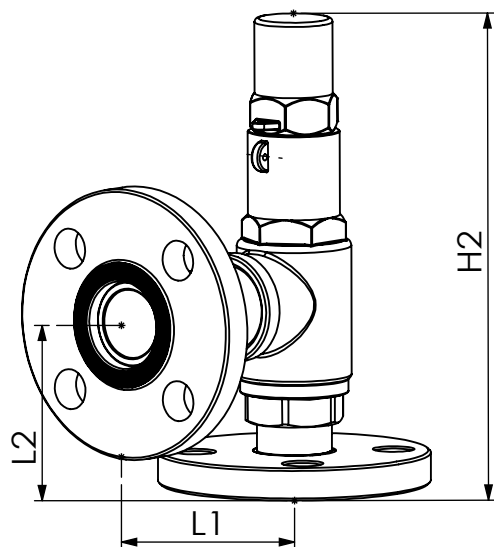

尺寸表

Dimension (FGXL-SSSF ~ FGXL-SSSFF) + Flanged ends (mm)

NOMINAL			FGXL-SSSF~FGX-SSSF				FGXL-SSSFF~FGX-SSSFF				Working Pressure (Kg/cm2)
P1	D	P2	L1	L2	H1	H2	L1	L2	H1	H2	
1/2"	15	1"	41.25	70.5	204.5	182.5	105.75	70.5	204.5	182.5	0.4~40
1/2"	15-10.5	1"	41.25	70.5	204.5	182.5	105.75	70.5	204.5	182.5	40~165
1/2"	10.5-7.5	1"	41.25	70.5	204.5	182.5	105.75	70.5	204.5	182.5	165~322
1/2"	7.5-5.5	1"	41.25	70.5	204.5	182.5	105.75	70.5	204.5	182.5	322~600
1/2"	5.5-5	1"	41.25	70.5	204.5	182.5	105.75	70.5	204.5	182.5	600~720
3/4"	19.5	1"	41.25	70	204	182	105.75	70	204	182	0.4~40
3/4"	19.5-10.5	1"	41.25	70	204	182	105.75	70	204	182	40~165
3/4"	10.5-7.5	1"	41.25	70	204	182	105.75	70	204	182	165~322
3/4"	7.5-5.5	1"	41.25	70	204	182	105.75	70	204	182	322~600
3/4"	5.5-5	1"	41.25	70	204	182	105.75	70	204	182	600~720
1"	21	1"	41.25	75.5	209.5	187.5	105.75	75.5	209.5	187.5	0.4~40
1"	21-13	1"	41.25	75.5	209.5	187.5	105.75	75.5	209.5	187.5	40~100
1"	13-10.5	1"	41.25	75.5	209.5	187.5	105.75	75.5	209.5	187.5	100~165
1"	10.5-7.5	1"	41.25	75.5	209.5	187.5	105.75	75.5	209.5	187.5	165~322
1"	7.5-5.5	1"	41.25	75.5	209.5	187.5	105.75	75.5	209.5	187.5	322~600
1"	5.5-5	1"	41.25	75.5	209.5	187.5	105.75	75.5	209.5	187.5	600~720
1"	25	2"	65	105.3	289	265.5	133.5	105.3	289	265.5	0.7~20
1 1/4"	33	2"	65	106.8	290.5	267	133.5	106.8	290.5	267	0.7~20
1 1/4"	33~27.5	2"	65	106.8	290.5	267	133.5	106.8	290.5	267	20~70
1 1/4"	27.5~22	2"	65	106.8	290.5	267	133.5	106.8	290.5	267	70~110
1 1/4"	22~20	2"	65	106.8	290.5	267	133.5	106.8	290.5	267	110~130
1 1/4"	20~15	2"	65	106.8	290.5	267	133.5	106.8	290.5	267	130~220
1 1/2"	39	2"	65	107.3	291	267.5	133.5	107.3	291	267.5	0.7~20
1 1/2"	39-30	2"	65	107.3	291	267.5	133.5	107.3	291	267.5	20~60
1 1/2"	30-27.5	2"	65	107.3	291	267.5	133.5	107.3	291	267.5	60~70
1 1/2"	27.5-22	2"	65	107.3	291	267.5	133.5	107.3	291	267.5	70~110
1 1/2"	22-20	2"	65	107.3	291	267.5	133.5	107.3	291	267.5	110~130
1 1/2"	20-15	2"	65	107.3	291	267.5	133.5	107.3	291	267.5	130~220
2"	39	2"	65	110.3	294	270.5	133.5	110.3	294	270.5	0.7~20
2"	39~27.5	2"	65	110.3	294	270.5	133.5	110.3	294	270.5	20~70
2"	27.5~22	2"	65	110.3	294	270.5	133.5	110.3	294	270.5	70~110
2"	22~20	2"	65	110.3	294	270.5	133.5	110.3	294	270.5	110~130
2"	20~15	2"	65	110.3	294	270.5	133.5	110.3	294	270.5	130~220